

Project	Type
Product Code	Date

# VALTO Luminaire

## Assembled in USA Version

### Summary

- GSA listed/assembled in USA
- DLC listed for line voltage 120-277 VAC
- Five years or 50,000 hours warranty<sup>3</sup>

### I50W Version – High Lumen Output

- Ambient air operation to 50°C/122°F at full power

### I05W Version – High Temperature Operation


- 20,000 Lumens, 130 L/W
- 15,000 Lumens, 143 L/W
- Ambient air operation at full output power 65°C/149°F

### Control Options

- 0-10V (dim to off at 0V)
- RF occupancy and daylight sensor option
- Bluetooth option

### Mechanical

- Vertical orientation only
- Beautiful anodized solid aluminum body
- 1.85 kg/4.1 lb
- Fanless for high reliability and efficiency

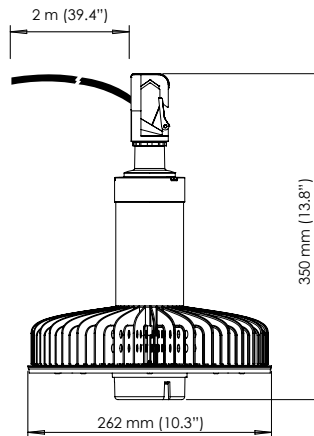

### Photometry

- No external reflector needed thus no reflector loss factor
- 50° glare cutoff with  $UGR_{ave} < 15$
- Optical distribution with high uniformity  $E_{Min/Avg} > 0.75$   
SC=0.5 to 1.5
- Compatible with upright accessory

### Electrical

- No flicker
- 6kV surge protection
- No inrush current
- 90-305 VAC 50/60 Hz input voltage max
- PF>0.9/THD<20%

VAC	100	110	120	220	240	277
AMPs	1.5	1.36	1.25	0.68	0.63	0.54

### Certifications

- UL damp listed for 120-277VAC
- Suitable for dry and damp locations
- This device is not intended for use with emergency exits



[Web Link](#)

### Ordering Information

Controls	Type	Max. Envir. Temp.	Product Code	Part #	Watts	Lumens	CCT	DLC ID	DLC Type
0-10V	High Lumen Output	50°C	03330	VAL-FIX-150-8-40-VL-AN-B90-010-000-BA	150	20,000	4,000K	PAOIEH9Q	Premium
			03338	VAL-FIX-150-8-50-VL-AN-B90-010-000-BA	150	20,000	5,000K	PKOHE0WZ	Premium
	High Temperature Environment	65°C	03326	VAL-FIX-105-8-40-VL-AN-B90-010-000-BA	105	15,000	4,000K	PGNU079U	Premium
			03334	VAL-FIX-105-8-50-VL-AN-B90-010-000-BA	105	15,000	5,000K	PIGT4965	Premium
Occupancy and Daylight Sensor	High Lumen Output	50°C	03331	VAL-FIX-150-8-40-VL-AN-B90-OC1-000-BA	150	20,000	4,000K	PQO2EDIJ	Premium
			03339	VAL-FIX-150-8-50-VL-AN-B90-OC1-000-BA	150	20,000	5,000K	PRCFKZCO	Premium
	High Temperature Environment	65°C	03327	VAL-FIX-105-8-40-VL-AN-B90-OC1-000-BA	105	15,000	4,000K	PNJST190	Premium
			03335	VAL-FIX-105-8-50-VL-AN-B90-OC1-000-BA	105	15,000	5,000K	PTXF420H	Premium
Bluetooth® Wireless *USA Only	High Lumen Output	50°C	03332	VAL-FIX-150-8-40-VL-AN-B90-BLE-000-BA	150	20,000	4,000K	P8M76CAR	Premium
			03340	VAL-FIX-150-8-50-VL-AN-B90-BLE-000-BA	150	20,000	5,000K	P7W2JS5Z	Premium
	High Temperature Environment	65°C	03328	VAL-FIX-105-8-40-VL-AN-B90-BLE-000-BA	105	15,000	4,000K	PPQA794Z	Premium
			03336	VAL-FIX-105-8-50-VL-AN-B90-BLE-000-BA	105	15,000	5,000K	PHEFW3Z6	Premium

1. Unless otherwise specified, all values are typical at 25°C with no optical accessory.  
 2. See limited warranty for details.  
 3. Specifications subject to change without notice.

4. Not intended for use in wet environments or environments containing airborne corrosive agents such as chemicals, solvents or cutting fluids.