

HIGH CRI

DATE	PROJECT	PART NUMBER	TYPE
------	---------	-------------	------

FEATURE


- 90 CRI
- Low glare with UGR<18
- Black cosmetic band to darken lens edge by eliminating light leakage
- IP65 / Wet Listed
- 16,600 Lumens, 111 L/W, 150W
 - Compatible with open fixtures with top ventilation
 - Full light output to 50°C/122°F ambient then gradually dims to 70% output at 60°C/140°F then to 55% at 65°C/150°F
- 12,400 Lumens, 118 L/W, 105W
 - Compatible with enclosed fixtures
 - Full light output to 60°C/140°F ambient then gradually dims to 75% output at 65°C/140°F
- Type B: Line voltage 100-277 VAC
- Wireless and wired control options
- Five years or 50,000 hours warranty²

CONTROL OPTIONS

- Field installed control module caps without tools including Wireless Bluetooth Mesh. Occupancy and daylight sensor
- Dims to 10% then to Off

MECHANICAL

- EX39 socket, Vertical orientation only, 1.65 kg / 3.6 lb
- Beautiful anodized solid aluminum body
- Required use of provided safety harness

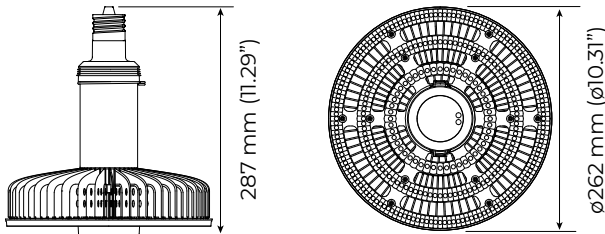

CERTIFICATION (PENDING)



ORDERING INFORMATION

EXAMPLE PART NUMBER: V2L-X39-105-9-27-VL-AN-B90-000-000-FL

CATEGORY	MOUNTING	POWER	CRI	CCT	DRIVER	FINISH	OPTICS	OPTICAL ACCESSORY	CONTROLS	OTHER
V2L	X39		9		VL	AN	B90	000	000	FL
V2L V2L	X39 EX39 Base	105 105W 150 150W	9 90 CRI	27 2700K 30 3000K 35 3500K	VL 100-277V	AN Anodized	B90 90° Beam	000 None	000 None	FL Filamento

PHOTOMETRY

- 50° glare cutoff with $UGR_{ave} < 18$

Power	CRI	Lumens @ CCT				
		2700K	3000K	3500K	4000K	5000K
105W	90	12,100	12,400	12,900	13,200*	13,200*
150W	90	16,100	16,600	17,100	17,600*	17,600*

* Custom order, inquiry for availability

ELECTRICAL

- Type B
- 100-277 VAC 50/60 Hz input voltage
- < 1% flicker
- 6 kV surge protection, PF>0.9/THD<20%

VAC	100V	110V	120V	220V	240V	277V
AMPs @105W	1.05A	0.95A	0.88A	0.48A	0.44A	0.38A
AMPs @150W	1.5A	1.36A	1.25A	0.68A	0.63A	0.54A

PRODUCT COMPATIBILITY

- [Valto Base](#), [Yoke 10](#), [Transcendent System](#)
- Control Caps, Diffuser, [Uplight](#)

REFERENCE LINKS

- [Installation Instructions](#)

1. Unless otherwise specified, all values are typical at 25°C, 240VAC
 2. [See limited warranty for details](#)
 3. Specifications subject to change without notice

4. Not intended for use in environments containing airborne corrosive agents such as chemicals, solvents or cutting fluids
 5. Inquire for availability as may require special order for quantities beyond samples