

HIGH EFFICIENCY

DATE	PROJECT	PART NUMBER	TYPE
------	---------	-------------	------

## FEATURE


- High Efficiency up to:
  - 151 L/W @ 80 CRI 26,000 Lumens
- Low glare with  $UGR_{ave} < 18$
- Thermal protection dims light to guarantee reliability
- 45°C/113F Ambient full output then dims up to 75°C/167F
- Type A: Line voltage 100-277 VAC
- Open and vented fixtures operation
- IP65, Wet Listed, Five years or 50,000 hours warranty<sup>2</sup>

## CONTROL OPTIONS

- Field installed control module caps without tools including Wireless Bluetooth Mesh. Occupancy and daylight sensor
- Dims to 10% then to Off

## MECHANICAL

- EX39 socket, Vertical orientation only, 1.65 kg / 3.6 lb
- Beautiful anodized solid aluminum body
- Required use of provided safety harness

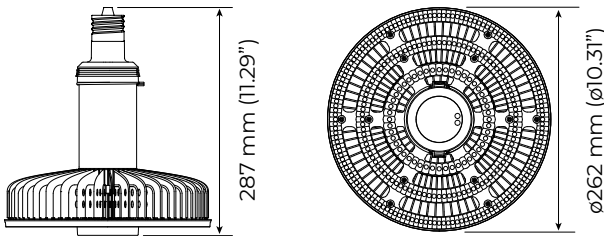

## CERTIFICATION

- Pending
  - UL wet listed, UL 1598C retrofit kit, DLC, KC



## PHOTOMETRY

- 50° glare cutoff with  $UGR_{ave} < 18$

Power	CRI	CCT					
		2700K	3000K	3500K	4000K	5000K	5600K
165W	80		24,500	25,200	26,000	26,000	
	90		20,100	20,700	21,300	21,300	

## ELECTRICAL

- Type B
- 100-277 VAC 50/60 Hz input voltage
- < 1% flicker
- 6 kV surge protection, PF>0.9/THD<20%

VAC	100V	110V	120V	220V	240V	277V
AMPS @165W	1.65A	1.5A	1.38A	0.75A	0.69A	0.6A

## PRODUCT COMPATIBILITY

- Valto Base, Transcendent System
- Control Caps, Diffuser, Uplight
- Emergency Battery

## REFERENCE LINKS

- [Installation Instructions](#)

## ORDERING INFORMATION

EXAMPLE PART NUMBER: V2M-E39-165-8-40-VL-AN-B90-000-000-FL

CATEGORY	MOUNTING	POWER	CRI	CCT	DRIVER	FINISH	OPTICS	OPTICAL ACCESSORY	CONTROLS	OTHER
V2M	E39	165			VL	AN	B90	000	000	FL
V2M V2M	E39 EX39 Base	165 165W	8 80 CRI 9 90 CRI	30 3000K 35 3500K 40 4000K 50 5000K	VL 100-277V	AN Anodized	B90 90° Beam	000 None	000 None	FL Filamento

1. Unless otherwise specified, all values are typical at 25°C, 240VAC  
 2. [See limited warranty for details](#)  
 3. Specifications subject to change without notice

4. Not intended for use in environments containing airborne corrosive agents such as chemicals, solvents or cutting fluids  
 5. Inquire for availability as may require special order for quantities beyond samples