FILAMENTO

CR1: Canopy Round

North America

Low glare round canopy fixture

Date	Project	Part #

Applications

- Canopies
- Parking Garages
- Covered Parking
- Low Bay

Features

- 40W, 60W, 80W available
- Low glare
- Batwing wide distribution
- 131 L/W
- Suitable to up to T_A = 50˚C
- 120-277VAC
- Five year warranty[2]
- See website for installation guide and IES file

World Wide Certifications (Pending)

- ETL
- IP66
- See regional section for applicable certification

Control Options

- Compatible with 3-Pin Control Modules

Mechanical & Accessories

- 9.7 lbs / 4.4 kg

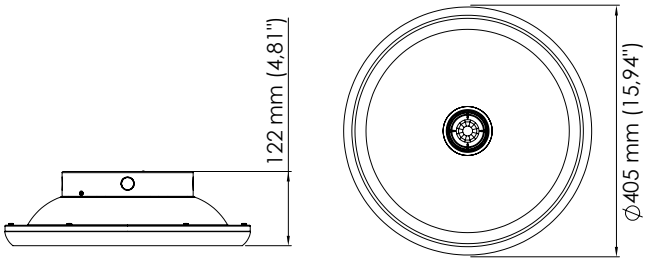

Lumen Maintenance

- L70 rating of 156,000 hours

Sales@Filamento.com | +1 (408) 475-0038 | www.Filamento.com

FILAMENTO

CR1: Canopy Round

North America

Low glare round canopy fixture

Date	Project	Part #

Photometry

- Diffused Lens
- 5% Uplight

- Lumens:

		Lumens @ CCT			
CRI	**Power**	**2700K**	**3000K**	**4000K**	**5000K**
80	**40W**	-	4,847	5,240	5,240
80	**60W**	-	7,271	7,860	7,860
80	**80W**	-	9,694	10,480	10,480

- Polar light distribution diagram @ 80W

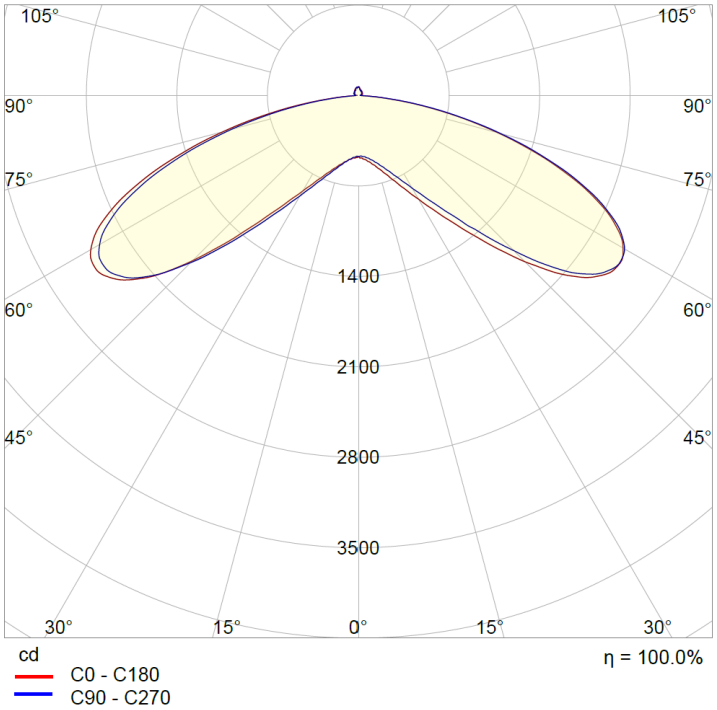

Electrical

- VS: 120-277 VAC, 50-60Hz

	Amps @ Line Voltage (VAC)			
	120V	**220V**	**240V**	**277V**
40W	0.33A	0.18A	0.17A	0.14A
60W	0.50A	0.27A	0.25A	0.22A
80W	0.67A	0.36A	0.33A	0.29A

1. Unless otherwise specified, all values are typical at 25°C 277VAC ± 10% tolerance
2. See limited warranty for details
3. Specifications subject to change without notice
4. Not intended for use in environments containing airborne corrosive agents such as chemicals, solvents, or cutting fluids

Sales@Filamento.com | +1 (408) 475-0038 | www.Filamento.com

FILAMENTO

CR1: Canopy Round

North America

Low glare round canopy fixture

Date	Project	Part #

Applicable Regions

- North America
- ETL Listed, IP66

IP66

Summary

- VS: Line Voltage 120-277 VAC
- Certified to ETL Listed, IP66 [Pending]

Part # Key

- Not all combinations are valid or readily available - See ordering table for standard models
- Call for availability of 90 CRI and 3000K CCT - MOQ may apply

Series		Region		Power		CRI		CCT		Driver		Finish		Optics		Optical Accessory		Control Module	
CR1	Canopy Round	FIX	North America	40 60 80	40W 60W 80W	8	80 CRI	40 50	4000K 5000K	VS	120-277V	WH	White	BW1	Batwing	000	N/A	300	3 Pin Connector Ready for Control Module

Mounting		Future Field		Termination		Other
JVX	Surface Mount	000	N/A	B0W3	3 Power Wire, Bare Wire Termination	FL

Sales@Filamento.com | +1 (408) 475-0038 | www.Filamento.com