

Applications

- Soffit
- Corridors
- Stairwells
- Hospitality
- Multi-Family Housing
- Schools

Control Options


- Compatible with 3-Pin Control Modules

Features

- 14W, 27W, 34W also available
- Low glare
- Batwing wide distribution
- 131 L/W
- Suitable up to $T_A = 50^\circ\text{C}$
- 120-277VAC
- Five year warranty²
- See website for installation guide and IES file

Mechanical & Accessories

- 9lbs / 4.08kg

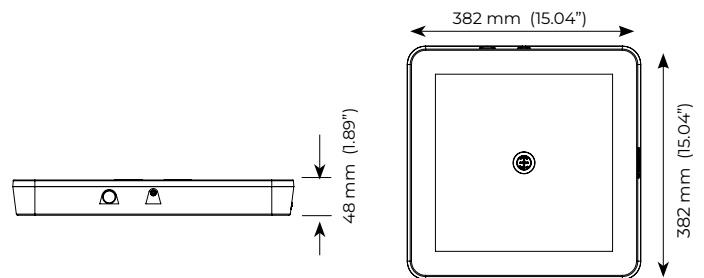

World Wide Certifications (Pending)

- ETL
- IP66
- See regional section for applicable certification

Lumen Maintenance

- L70 rating of 246,000 hours



Photometry

- Diffused Lens
- 5% Uplight

- Lumens:


CRI	Power	Lumens @ CCT			
		2700K	3000K	4000K	5000K
80	14W	-	-	1,834	1,834
80	27W	-	-	3,537	3,537
80	34W	-	-	4,454	4,454

Electrical

- VS: 120-277 VAC, 50-60Hz

	Amps @ Line Voltage (VAC)			
	120V	220V	240V	277V
14W	0.12A	0.06A	0.06A	0.05A
27W	0.23A	0.12A	0.11A	0.10A
34W	0.28A	0.15A	0.14A	0.12A

- Polar light distribution diagram @ 27W

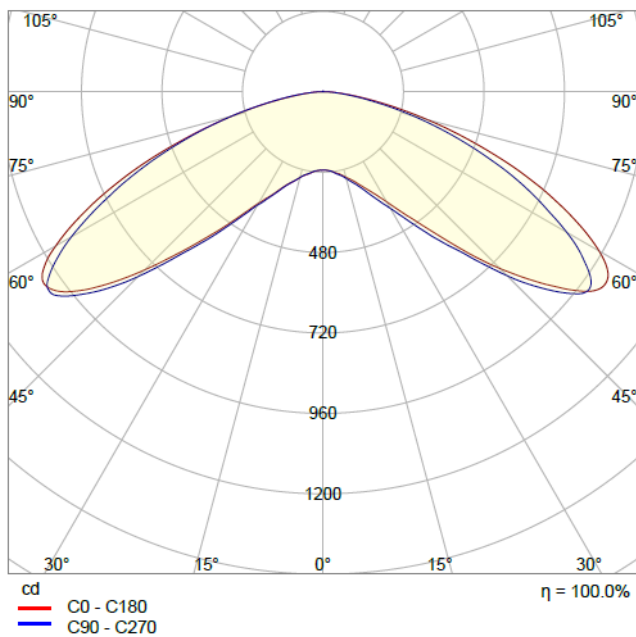

1. Unless otherwise specified, all values are typical at 25°C 277VAC $\pm 10\%$ tolerance
2. [See limited warranty for details](#)
3. Specifications subject to change without notice
4. Not intended for use in environments containing airborne corrosive agents such as chemicals, solvents, or cutting fluids

Applicable Regions

- North America
- ETL Listed, IP66



Summary

- VS: Line Voltage 120-277 VAC
- Certified to ETL Listed, IP66 [Pending]

Part # Key

- Not all combinations are valid or readily available - See ordering table for standard models
- Call for availability of 90 CRI and 3000K CCT - MOQ may apply

Series		Region		Power		CRI		CCT		Driver		Finish		Optics		Optical Accessory		Control Module	
CSI	Canopy Square	FIX	North America	14 27 34	14W 27W 34W	8	80 CRI	40 50	4000K 5000K	VS	120-277V	WH	White	BW1	Batwing	000	N/A	300	3 Pin Connector Ready for Control Module

Mounting		Future Field		Termination		Other	
JVX	Surface Mount	000	N/A	B0W3	3 Power Wire, Bare Wire Termination	FL	