

HIGH EFFICIENCY

DATE	PROJECT	PART NUMBER	TYPE
------	---------	-------------	------

FEATURE


- High Efficiency 158 L/W
- Low glare with UGR<18
- IP65 / Wet Listed
- Thermal protection dims light to guarantee reliability even > 65°C/150°F
- 45°C/113°F Ambient full light output then gradually dims to 80% output at 50°C/122°F then to 60% at 60°C/140°F
- Compatible with 3/8" flexible conduit
- Compatible with 3/4" conduit stem mount when hook is unscrewed
- Five years or 50,000 hours warranty²

CONTROL OPTIONS

- Field installed control module caps without tools including Wireless Bluetooth Mesh. Occupancy and daylight sensor
- Dims to 10% then to Off

MECHANICAL

- Fixture socket, Vertical orientation only, 1.65 kg / 3.6 lb
- Beautiful anodized solid aluminum body
- Required use of provided safety harness

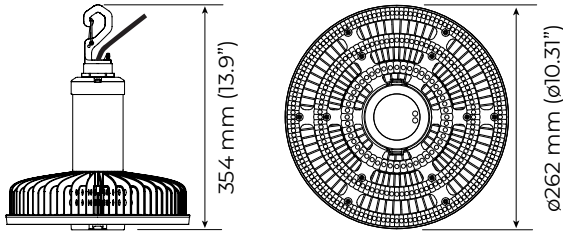

PHOTOMETRY

- 50° glare cutoff with UGR_{ave}<18

Power	CRI	Lumens @ CCT				
		2700K	3000K	3500K	4000K	5000K
165W	80	23,700*	24,500*	25,200*	<u>26,000</u>	<u>26,000</u>

* Custom order, inquiry for availability

ELECTRICAL

- 100-277 VAC 50/60 Hz input voltage
- < 1% flicker
- 6 kV surge protection, PF>0.9/THD<20%

VAC	100V	110V	120V	220V	240V	277V
AMPS @165W	1.65A	1.5A	1.38A	0.75A	0.69A	0.6A

PRODUCT COMPATIBILITY

- Control Caps, Diffuser, [Uplight](#)

REFERENCE LINKS

- [Installation Instructions](#)

CERTIFICATION (PENDING)



ORDERING INFORMATION

EXAMPLE PART NUMBER: V2M-FIX-165-8-40-VL-AN-B90-000-000-FL

CATEGORY	MOUNTING	POWER	CRI	CCT	DRIVER	FINISH	OPTICS	OPTICAL ACCESSORY	CONTROLS	OTHER
V2M	FIX	165	8		VL	AN	B90	000	000	FL
V2M V2M	FIX Fixture	165 165W	8 80 CRI	40 4000K 50 5000K	VL 100-277V	AN Anodized	B90 90° Beam	000 None	000 None	FL Filamento

1. Unless otherwise specified, all values are typical at 25°C, 240VAC
 2. [See limited warranty for details](#)
 3. Specifications subject to change without notice

4. Not intended for use in environments containing airborne corrosive agents such as chemicals, solvents or cutting fluids
 5. Inquire for availability as may require special order for quantities beyond samples